ROAD EST

CITROEN GS CLUB



We could start off by saying that the Citroen GS Club is a £1088 four-seater saloon with front wheel drive, a 1015 cc air-cooled flat-four engine, and ample luggage space within its distinctively styled body. Yet the GS differs so fundamentally in character from its rivals that a "potted" assessment of this kind falls flat from the moment it starts.

The GS is not so much a typical French car as a typical Citroen. It is well known to the most casual of motoring enthusiasts that Societe Anonyme Automobiles Citroen prefer to ignore convention and rely instead on ingenuity and clear-cut objectivity. The Dyane, the Ami 8, the D-series, and the new SM are remarkable for their individuality in design and behaviour, yet the company has never produced a failure.

The GS slots into a crucial gap in the Citroen range, a worthy competitor in the coveted £1100 class. Citroen fans who have been waiting for this model, which bridges the gap between luxury cars for the well-to-do, and corrugated iron devices for the less well heeled, will not be disappointed. Once again, common sense has been the guiding force behind the company's apparently eccentric attitude. To the driver who laments the conformity of the modern box automobile the GS must represent a successful denial of the conformist attitude.

After all the ballyhoo surrounding its introduction we found the GS, in the cold light of objective analysis, to be a serious threat to its rivals. While its performance is geared to achieve maximum economy in

relation to French tax regulations, it is by no means the slow-coach that a first impression might suggest. Roadholding and handling are remarkable, while the standard of comfort is most unlikely to be equalled in other cars at the same price. At the same time, the car is far from being above criticism on a number of detail matters, as we shall see later.

Performance and economy

In France, petrol is very expensive and road fund tax is levied according to a car's engine capacity. Compared with other countries in Europe, French roads tend to be straight, flat and bumpy. French cars as a rule, therefore, have small efficient engines, high gearing for prolonged high speed cruising, and soft suspension that can glide smoothly over bad roads.

The GS is no exception. The standing start acceleration may be better than that of most other cars of a similar engine displacement but at 15.9sec. to 60 mph it is below average for a car of its price. However, the top speed of 93.2 mph is good especially as the GS can be cruised continuously at around 90 mph without damage or danger.

The horizontally opposed flat-four air-cooled engine is extremely oversquare with bore and stroke figures of 74mm x 59mm. With a compound choke Solex carburetter and a compression ratio of 9:1 within its hemispherical combustion chambers, the G10 engine that goes into the GS produces no more than 55.5 bhp (DIN)

at 6500 rpm and 52 ft.lb. (DIN) of torque at 3500 rpm. This explains the fairly leisurely standing start figures but not the high cruising speed of the car, which is largely due to exceptionally good aerodynamics.

As most people are aware, a car's drag is determined by frontal area and shape. As the air passes over the body it is important to maintain an even flow right to the back of the car. A sharply dropping tail permits this flow to separate from the body and this exacerbates the drag. As it is not practical to build road cars with long, sloping tails, the best answer is to maintain the ideal shape as far as possible and then cut it off flat. The GS fulfils this theory and is one of the most efficient aerodynamic shapes available amongst current saloons. Hence it can reach and hold its top speed with relative ease. The result is that in top gear above 50 mph the GS is a match for many more powerful saloon cars, and it is only on hills that its small engine reveals itself by demanding a downward change.

No doubt the ideally balanced cylinder configuration contributes to the smoothness of the engine, which is enhanced by the fact that it is as quiet as many water-cooled motors. Torque below 3000 rpm is adequate and the power increases right up to maximum revs: this is shown as 6500 rpm on the tachometer on the newly introduced right-hand-drive car we tested, although the lhd version we tried in the Spring was red-lined 6750 rpm. The engines on both cars were identical and Citroen offer no



explanation beyond the fact that the engine can safely be revved to about 8000 rpm. Although the handbook states that the rev limit must not be exceeded the tachometer needle varied between 6300 rpm and 6700 rpm on our maximum speed test lap at MIRA. However, there is little point in exceeding 6500 rpm as a rule because the power curve goes into a decline at this point. Citroen's claim about the engine's robustness gains credence with the knowledge that the conrods are one-piece components fitted to a crankshaft that may be stripped into several separate parts. The engine certainly feels willing and unburstable. The only serious criticism was against its poor starting and slow warm-up.

We recorded an overall fuel consumption of 25.6 mpg. In the Petrometa tests the steady speed fuel consumption increased smoothly as speed rose to 70mph, although from then on the increases were markedly less severe for each 10 mph rise in speed. No doubt this is a result of the GS's excellent body shape.

Transmission

The transaxle gearbox, which drives the front wheels, sits behind the engine and just ahead of the passenger compartment. Despite this apparently ideal situation for a floor-mounted gear shift, movement of the lever through the conventional H-pattern shift is not particularly easy. In heavy traffic, the notchy feel to the change becomes rather irritating despite the light, easy clutch. The



No matter how you throw it around, the GS clings to the road with remarkable tenacity, and the handling is excellent





The cloth-upholstered seats are very comfortable and back seat passengers are not cramped. The headrests are extras.



gears never fail to engage, and the synchromesh is effective, but the 'box does not take well to quick changes. Reverse gear is obtained by depressing the lever while moving it right and forward.

There is some transmission snatch at low speeds on the overrun and a more annoying jerky pick-up when the throttle is opened in these conditions. It is perhaps this movement of the complete engine and transmission assembly that spoils the gearchange feel.

None of the gears is direct and all of them whine noticeably. The ratios, however, could hardly be better: with speeds in the intermediate gears of around 31, 46, and 73 mph the engine is kept within its ideal power band all the time when driven hard. The slightly smaller jump to top from third is well-judged, too, and in top gear maximum speed corresponds almost exactly to maximum power and maximum permissible revs.

Handling and brakes

Citroen are rightly proud of their hydraulic system which serves both the suspension and braking systems. A high pressure pump feeds an accumulator with hydraulic fluid via a regulator which prevents the pressure from rising above 2600 psi. Fluid is fed to front and rear height correctors in the self-levelling, all independent suspension. Return lines pass the fluid back into a reservoir. A third delivery line supplies the braking force so that pedal pressure merely opens a valve against spring pressure.

Between the seats is a lever for raising the ride height of the car. There are three positions: fully forward for all normal use, a central notch for slow driving along rutted roads or through floods and fords, or fully back to assist in wheel changing or negotiating extraordinary ramps. The car should never be driven for any distance in the rearward notch as this raises the suspension to its absolute limit. There is, of course, no need to use this lever when the car is laden as it will automatically find its normal ride height.

After starting up, you must wait perhaps five seconds to allow the car to "blow itself up". On the move, it did not take us long to appreciate the incredible roadholding of the GS. Although it does not look the part,

largely because it rolls a bit, it can keep up with most expensive sports cars on corners and its limits exceed those of most other cars with ease.

Every car has its limit, of course, and for the GS this is marked by understeer under power. Should a corner be entered too fast, and the degree of understeer begins to be alarming, the situation is easily retrieved by backing off the throttle, whereupon a neutral attitude is quickly adopted. Should this be insufficient a degree of oversteer can be induced by applying the brakes momentarily. It is quite easy to turn into corners on the overrun, braking to pull the back round a little, and then floor the throttle and drive out of the corner. We never came near to losing control while investigating these techniques at the test track. It is a remarkably stable car, far more predictable and responsive than almost any other front-wheel-drive car we have tried. Wet weather roadholding and handling are no less impressive.

The brakes feel reassuring and powerful and did not fade during our 20-stop fade test. There is only about $\frac{3}{4}$ in. of movement in



Above: the curious spade-handle handbrake has a trigger release (hidden) and works surprisingly well. Two of the heater knobs to the left fell off, suggesting skimpy finish. Below: fingertip stalks and push-button fan switches



the pedal and it took a few miles to acquire the necessary sensitivity to use the brakes smoothly. Even so, we found in the fade test that the braking force is prone to slight variations at constant pedal pressures. Other criticisms were the strong smell of burning from the inboard discs from the eighth stop onwards and failure to achieve a better stop than 0.95g. This was recorded with a pedal pressure of 75lb. Applying 100lb. to the pedal only produced 0.86g retardation limited by wheel locking and judder. The brakes were unaffected by the watersplash.

The handbrake is an impressive arrangement which operates a second set of calipers on the front disc brakes. A strong pull on the lever at 30 mph produced a 0.36g stop as the lever went to the full extent of its travel; had the handbrake been better adjusted we might have achieved a better result.

Comfort and controls

All Citroens are renowned for their ride and the ease with which the suspension soaks up



Left: profile view emphasises large window area and sharply cut-off Kamm tail. The ride height is kept constant by self-levelling suspension

Motor Brief Test No 45/71 Citroen GS Club

Make: Citroen. Model: GS Club. Makers: S. A. Andre Citroen, 133 Quai Andre Citroen, Paris 15e. France. Concessionaires: Citroen Cars Ltd, Trading Estate, Slough, Bucks. Price: £869 plus £219.12 equals £1088.12. Headrests £22.50. Heated rear window £22.50. Radio £45. Total as tested £1178.12

		3	30-1	12 50 in	14 top	166	10
1089 1043 1051 1083					Ť	16	1
1043 1051 1083					Ť	16	1
6					Ť	16	1
6					Ť	16	1
6					Ť	16	1
					Ť	16	1
	-50		30-	50 in	top		
				8			
			NAME OF TAXABLE PARTY.				
		-		\rightarrow			
							*
					Т		
15	2	0	25	30	35	40	4
0	vera			H			
							-
				-	1	N. I	

Performance tests carried out by Motor's staff at the Motor Industry Research Association proving ground, Lindley. Test Data: World copyright reserved; no unauthorised reproduction in whole or in part.

Conditions

fifth gear *

Weather: Dry with light wind to 10mph Temperature: 66-72°F Barometer: 30.0 in. Hg. Surface: Dry tarmacadam Fuel: Premium 98 octane (RM) 4-Star


Maximum Speeds

	mph	kph
Mean lap banked circuit	93.2	150
Best one-way 1-mile	96.9	156
3rd gear	69	111
2nd gear > at 6500 rpm	43	70
1st gear	27	43
"Maximile" speed: (Time	d quarte	er mile
after 1 mile acceleration	ng from	rest)
Mean	. 90.0	
Best	. 91.1	

Acceleration Times

mph												sec
0-30		٠.						-	0			4.5
0-40									*	15	(0)	7.2
0-50					4					10		11.2
0-60		-										15.9
0-70		-				0	3	2				22.7
0-80			-	340								34.7
Standi	ng	qu	uar	ter	m	ile					19	20.1
Standi	ng	ki	lon	net	re			1 2	×			38.2
								To	op			3rd
mph								SE	ec.			sec.
10-30				83 70				-				9.7

20-40	US				9	12.7	8.6
30-50		9				12.6	8.2
40-60						13.3	8.9
50-70			339.5			16.0	-
60-80	1	*	100	2.5	32	21.3	_



Fuel Consumption

30 mph	and	m	axi	m	um	le	SS	5%	allowance
for accel	era	tio	n)			2			29.6 mpg
Overall	(*)		K.			8		*	25.6 mpg
				(=	= 1	1.0) C	itr	es/100km
Total tes	t di	sta	ano	е					870 miles

Brakes

Pedal pressure, deceleration and equivalent stopping distance from 30 mph

lent stoppi	ng distance from 3	0 mph
lb.	g.	f
25	0.49	61
50 75	0.89	34
75	0.95	31-

ndbrake	0.36	83

Fade Test

20 stops at $\frac{1}{2}g$ deceleration at 1 min. intervals from a speed midway between 40 mph and maximum speed (=67 $\frac{1}{2}$ mph)

Pedal force at beginning		17		26	
Pedal force at 10th stop	. 0			29	
Pedal force at 20th stop				30	
Stooring					

Steering Turning circle

- Turning c	ircle l	bet	vee	n k	ert	os:			f	t.
Left				24	200				25	9.7
Right		20.3		4				×	28	3.8
Turns of	stee	ring	w	hee	el	fro	m	lo	ck	to
lock .	- K - W					*			3.	75
Steering	whe	el	defl	ect	ior	1 f	or	5	0	ft.
diameter	circle						1.	.1	tu	rns
200 0 0										

Clutch

Free pedal movement	$= \frac{3}{4} in.$
Additional movement to	disengage
clutch completely	$=3\frac{1}{4}$ in.
Maximum pedal load	. =20 lb.


Speedometer

Indicated	30	40	50	60	70
True	30	39	48	573	661
Indicated	80	90		-	
True	761	861			
Distance red	corder	1% fa:	st		

Weight

Kerb	weight	(unladen	with	fuel	for
appro	ximately	50 miles)	. 1	7.0 0	wt.
Front	rear dist	ribution		641/3	351
Weig	ht laden	as tested		080	

Motor Brief Test No 45 /71 Citroen GS Club

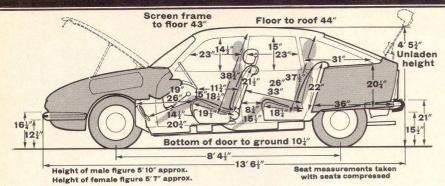

Engine
Block material Light alloy
Head material Light alloy
Cylinders Flat-4
Cooling system Air
Bore and stroke . 74mm. (2.93in.) 59mm. (2.32in.)
Cubic capacity 1015 cc (158 cu.in.)
Main bearings
Valves Single ohc per bank,
toothed belt
Compression ratio 9.0:1
Carburettor Solex 28CICM twin choke
Fuel pump Mechanical
Oil filter Dianagable contrides

Max. power (net) 55.5 bhp at 6500 rpm

Max. torque (net) 52 lb.ft. at 3500 rpm

Iransmi	S	SI	01	1						
Clutch	1				0.03	er 1	7.0)6i	n.	s.d.p.
					dia	apl	nra	gn	1 5	prung
Internal gear	bc	X	rat	ios	3					
Top gear		T			84	20	100	-		1.12
3rd gear		100			117					1.52
2nd gear	•	(6)		30	10	93	38	•		2.38
1st gear	38			*	33	8		-27	7	3.82
Reverse .				8	8.9	80		•0	18	4.18
Synchromesh	1			01	n a	11 1	on	wa	rd	ratios
Final drive	70			5	pi	ral	be	eve	14	.38:1
Mph at 1000) r	pr	n ii	1:						
top gear			0.40						ď	14.3
third gear					33	*	79			10.6
second ge									0	6.7
first gear					19	*	100	82	(8)	4.2
Chassis	a	n	d	b	06	dy	,			

Construction Unitary Brakes

Type	Citroen hydraulic discs front
	and rear
Dimensions	10.6in. dia. front,
	6 9in dia rear

-	Overall width 5' 3\frac{1}{4}"
	45"_234"
1	53" 52½" 49" 49"
1	Rear track 4' 4½"
	Front track 4' 64"
	Ground clearances Lowest point:- (under front suspension) 5½" under exhaust 6" under engine 7¾"

Susp	ension and steering
Front	Independent by double wish- bones with hydropneumatic struts, self-levelling
Rear	Independent by trailing arms, hydropneumatic self-levelling
Shock a	bsorbers:
Front an	suspension
Steering	type Rack and pinion
Tyres	145 x 15 Michelin ZX radials
Wheels	Pressed steel disc
Rim size	4.5 x 15
Coac	hwork and

Jackstand, wheel

equipment

Starting handle

Tool kit contents

Jack Adjustable stand Jacking points Under sill
Battery 12 volt negative earth,
30 amp/hr capacity
Number of electrical fuses 8
Headlamps SEV Marchal 40/45W
Indicators Non self-cancelling flasher
Reversing lamp Yes
Screen wipers 2-speed electric
Screen washers Electric
Sun visors Two, 1 vanity mirror
Locks:

Locks:	
With ignition key	Steering lock
With other keys	. Doors and boot
Interior heater	Fresh air
Upholstery Cloth se	eats, pvc headlining
Floor covering .	Carpet
Alternative body style	
Maximum load .	915lb.
Major extras available	Radio, heated
Mary Mary Control of the Control of	rear window

Maintenance

Fuel tank	cap	ac	ity		2		25		9	0.5	g	alls
Sump												
Gearbox t												
Steering g												
Coolant	10			- 0	i is					(8) (8)		Air
Chassis lu												
Minimum												
Ignition ti												
Contact b												
Sparking	plu	gg	gap)	ile.		30	,	(0.0	21	6in.
Sparking	plug	g ty	/pe)		104		Ma	arc	ha	13	345
Valve clea	ran	ice	(0	olo	1)		h	nle	t (0.0	00	8in.
						Ex	ha	us	t (0.0	100	8in.
Rear whe	el t	oe-	in							P	ara	allel
Front whe	el 1	toe	-in			40		0	to	0	.08	Bin.
Camber a	ngli	е			8 %			iş.		10		00
Castor an	gle			(4)			90	100		1	0	30'
Tyre press												
Front	100	40		**		*		204		1	26	psi
Rear												

the worst of surfaces so predictably the GS excels in this respect. With slightly firmer suspension than that of the D-series cars, it does not give quite the same magic carpet impression but it can travel over the most alarming potholes and sunken drain covers without jolting the occupants. What is particularly impressive is the lack of rock as you sweep from one lock to the other. Very good damping helps both this and the GS's ability to take humps and hollows in a better way than the larger cars can manage. Disappointingly, harsh thumps over sharp surface irregularities like cats' eyes excite several minor rattles and vibrations which we found surprising in a Citroen.


The exceptionally comfortable seats are covered in non-slip cloth and have firm padding around the edges, soft springing in the centre. They offer good lateral support on corners and were praised by all our drivers regardless of their size. There is ample room in the back for two adults, perhaps three for short distances, and legroom is good once you get your knees past the thick edges of the seat. With the front seat fairly well back the backrest hinders access and you have to wriggle through the gap between the front squab and back seat. The front seats recline through a large number of positions and the optional headrest can be adjusted or removed altogether.

Although the normal-looking brake pedal is used to operate the usual floor button it is still virtually impossible to make a heel and toe downchange—its advantage is that it is easier to hit in an emergency. The accelerator is rather high off the floor, dictating a rather uncomfortable ankle angle on part throttle-astute bending of the pedal rod should improve both.

Some of our drivers disliked the neckrests for their intrusion on three-quarter rear visibility as well as for the claustrophobic effect on those in the rear, but for reversing they are low enough to clear the eyeline to the base of the rear window. Reversing is easy when you know that the chopped-off tail ends only 8in. beyond the back window. Visibility is generally good with large glass areas and the thick screen pillars subtending only a small angle at the driver's eye—the fallaway bonnet line isn't always easy to aim through gaps, though. With the rear view mirror at the top of the screen, and less body movement, you can see following distant traffic more easily than in the D-range cars.

Our initial sampling of the GS suggested that its gearing was far too fussily low for quiet high speed cruising. However, although the engine is turning over around 5000 rpm at 70 mph, it is only the rev counter that makes you aware of this-a good reason for not having one. The engine is still audible and fussy at high speed, and perhaps thrown into prominence by the almost complete absence of wind noise.

We didn't have much chance to assess the heater as levers for two of the three controls fell off, but from our earlier assessment it was judged effective and controllable, particularly for a car with an air-cooled engine, although ram effect is poor below about 50 mph. Two levers control hot and cold air flows which together adjust temperature and the third horizontal lever is for distribution. Face-level eye-ball vents give an adequate throughput.

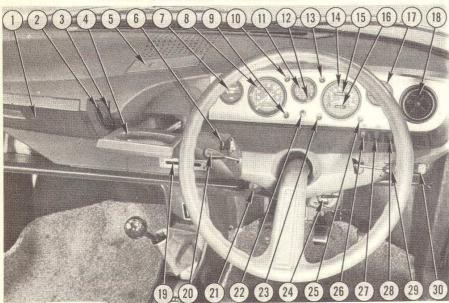

1 glove locker. 2 heater control. 3 ventilation control. 4 handbrake. 5 ashtray. 6 cigar lighter. 7 battery indicator. 8 rev counter. 9 oil pressure warning light. 10 main beam tell-tale. 11 clock. 12 clock setting. 13 side light tell-tale. 14 speedometer. 15 total mileage recorder. 16 trip mileage recorder. 17 fuel gauge. 18 ventilator. 19 heater direction distributor. 20 lighting stalk. 21 choke. 22 panel light rheostat. 23 hydraulic pressure warning light. 24 ignition/starter/steering lock. 25 indicator tell-tale. 26 heater blower. 27 heated rear window. 28 cold air fan. 29 horn/flasher/indicator stalk. 30 washer/wiper stalk





The unusual boot is a large symmetrical oblong hole, above, reached through a high-lifting tailgate supported by struts. The boot swallowed a respectable 10.4 cu. ft. of our test luggage, left

The engine bay, below, also houses the spare wheel and battery, leaving the boot free of these space-consuming ancillaries. Little can be seen of the flat-four engine itself which is buried down on the floor

Fittings and furniture

To keep the price of such a sophisticated car down to a very keen figure, some of the fittings are perhaps rather cheap. The grey facia is flock sprayed, the heater outlet ducts still have slivers of plastic where the ducts have been cut, and the fit is generally poor. However the "British" facia layout is much better than that on the "French" cars. Nice round dials are easily seen through the single-spoke steering wheel and the warning lights and tell-tales are all intelligently labelled. Fingertip stalks control the lighting, flashing, washing and wiping, while switches are required for the two heater fans, one hot, one cold, and the optional rear window demister.

The neat door handles are separate from the armrests which can be used as grab handles. Oddment space is provided by shelves at each end of the facia, but the rather deeper, more useful one on the driver's side unfortunately has no lip. The glove pocket is awkwardly shaped for, say, paperbacks, but the overall space is adequate. The boot is extremely large by any standards and took 10.4 cu. ft. of our Revelation luggage; the lid hinges up easily, once you remember that the centre part of the bumper comes up with it, to give a nice low loading platform.

Cloth upholstery is never the easiest to keep clean but the handbook gives instructions on removing stains. The door trims and headlining are in pvc.

Servicing and maintenance

Servicing is required every 6000 miles and can be done by the average competent home mechanic, but it pays to get this type of vehicle seen regularly by experts as emergency repairs soon get beyond the scope of the average garage. The toolkit allows for the unique Citroen system of wheelchanging, but little more. Access to the various ancillaries is comparatively easy and complete once the spare wheel and air filter have been removed.



